




**LONESTAR PRESTRESS MFG. INC.**  
 9316 Reid Lake Houston, TX 77064  
 TEL. (713) 896-0994, FAX (713) 896-0411 www.lonestarprestress.com

DWG.: CATALOG

CAT.: 967889

DATE:

PROJECT:




KEYWAY STOPS TO BE WELDED ON TOP SIDE ONLY. BOTTOM SIDE MUST BE SMOOTH SO CAP WILL SIT LEVEL ON POLE

DRILL 5/16" HOLES IN COVER (TYP. 2 PLCS)

REMOVABLE COVER  
3/16" PLATE

2.375" O.D. PIPE

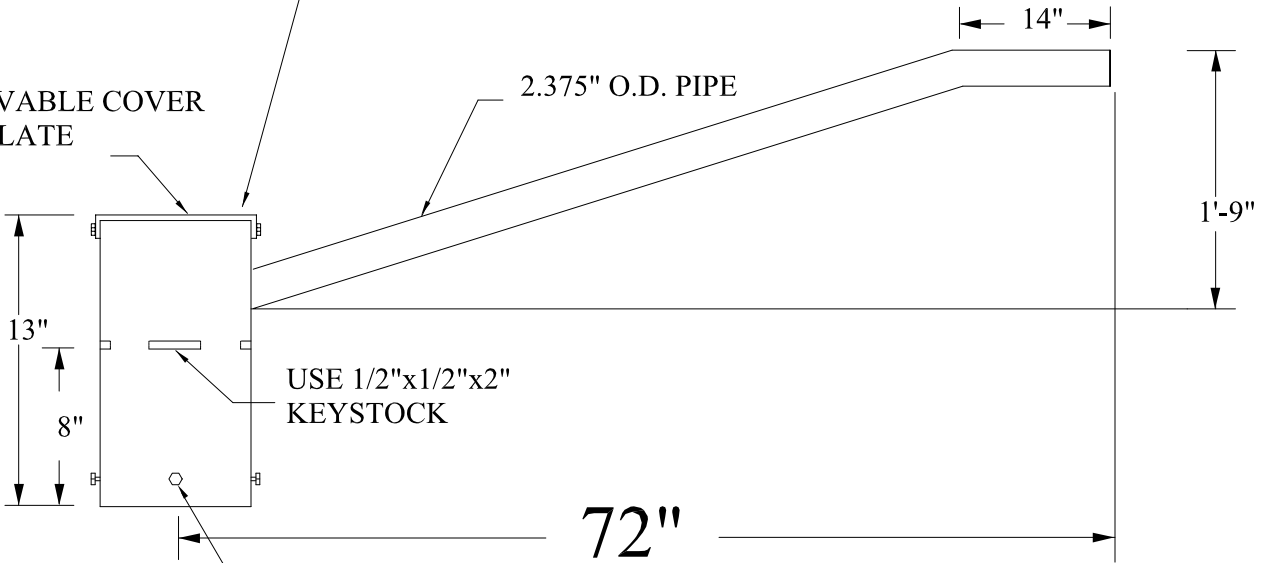

USE 1/2"x1/2"x2" KEYSTOCK

72"

DRILL & TAP FOR 5/16" S.S. SET SCREWS (TYP. 4 PLCS)

NOTES

- 1.) ALL PARTS SHALL BE STEEL
- 2.) ALL TOLERANCES SHALL BE 1/16"
- 3.) MATERIAL TO BE 3/16" STEEL UNLESS OTHERWISE NOTED.
- 4.) INSTALL 1/4"x20x1/4" S.S. BOLTS IN COVER.
- 5.) STEEL BRACKET TO BE GALVANIZED AFTER FABRICATION

DESCRIPTION:

**TYPE II STEEL  
SINGLE ARM BRACKET**

WEIGHT: 14 LBS

QTY:

FINISH: GALVANIZED STEEL