



9316 Reid Lake Dr.  
Houston, Texas 77064  
Phone: 713-896-0994  
web: [www.lonestarprestress.com](http://www.lonestarprestress.com)

## SOLID CONCRETE IS THE PERMANENT SOLUTION

### INSTALLATION

Installation can be done in a matter of hours. Our Concrete Vaults can be installed during the construction of a new structure or in an existing structure. A clearance of 24" on all sides is needed for the placement in an existing structure such as:


- \* Show Rooms
- \* Retail
- \* Garages
- \* Storerooms & Warehouses, etc.

Our vaults can be designed to meet your specifications and are available in a variety of sizes.



Our Vaults are engineered to meet or exceed the following:

- ❖ National Performance Criteria for Tornado Shelters Federal Emergency Management Agency.
- ❖ National Fire Protection Association (NFPA) two hour fire rating.
- ❖ Vault door carries a Class B Mercantile Burglary Insurance Rating and Underwriters Laboratories, Inc. labels and certification.
- ❖ Uniform Building Code UBC 1997
- ❖ UL-752 Level 4 Bullet Resistance.
- ❖ FEMA Standards 320 "Taking Shelter from the Storm".
- ❖ American Concrete Institute ACI-318-99
- ❖ American Society of Civil Engineers ASCE 7-98

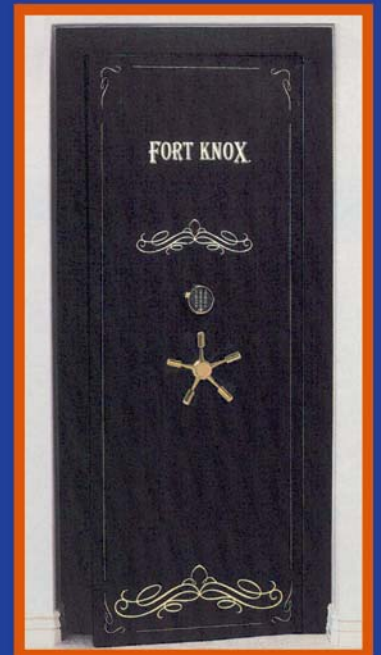

Variety of doors available in 2, 4 or 6 hour fire ratings.

Lonestar Prestress Mfg., Inc. manufactures a variety of prestressed concrete products:

- \* Concrete Safety Vaults
- \* EASI-SET Buildings
- \* Concrete Poles
- \* Brackets
- \* Foundations

On display at SWCI Safe Store • 12757 East Freeway • Houston, TX 77015  
713-455-2741 • [www.safesrus.com](http://www.safesrus.com)